
Hako Scrubmaster B12



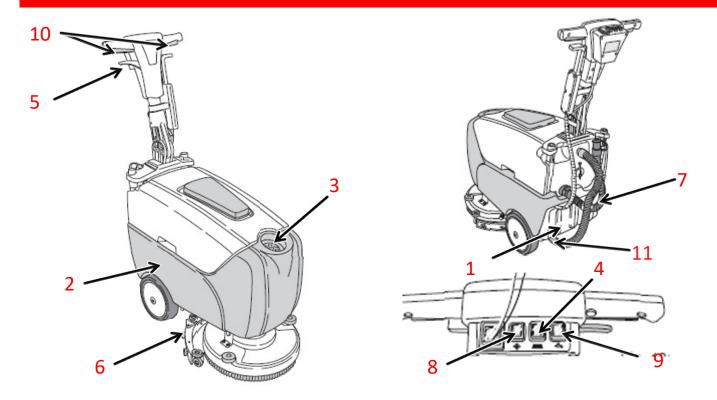

OPERATION:

- 1. Disconnect mains plug of the charger from outlet and fasten to holder 1.
- 2. Fill the clear water tank 2 from opening 3.(tank volume 16 l)
- 3. Switch the machine on by the switch 4.
- 4. Adjust the height of the handle with lever 5.
- 5. Use pedal 7 to lower squeegee 6.
- 6. Start the suction motor 8 and water 9.
- 7. Pull the starting lever to handle 10. Brushmotor starts.
- 8. Move on. Use switch 11 under the machine to adjust the water (if necessary)


NOTE! Make sure that pad / brush is installed!!!

Qualified persons only are authorised to operate the machine!

The machine is not designed for coarse material! Floor area sweeping before! Use only cleaning agents suitable for automatic machines (low-foaming)! Please pay attention to the informations in the instruction manua!

Hako Scrubmaster B12



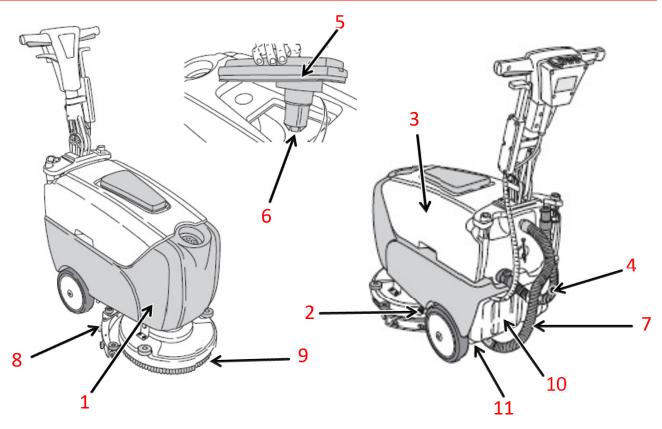

MAINTENANCE AND CARE:

Daily maintenance:

- ➤ Empty the clear water tank 1 from the valve 2.
- ➤ Empty soiled water tank 3 by the soiled water drain hose 4. Clean soiled water tank. Check and clean tank lid and lid sealing 5.
- > Check and if necessary clean the float 6.
- > Remove suction hose 7 and clean it.
- Remove squeegee 8 and clean it.
- ➤ Remove brush / pad holder 9 and clean brush / pad. Check brush / pad for wearing.
- ➤ Charge battery (take plug from holder 10 and connect with outlet).

Weekly maintenance:

- Check and clean brush head 9
- Check and clean clear water filter 11
- Clean the machine from outside
- ➤ Check squeegee sealing strips and turn or replace them if necessary

Cleaning result is bad:

- o suction hose 7 or squeegee 8 is blocked.
- Locking cap of the soiled water drain hose4 is open
- Tank lid sealing 5 of the soiled water tank is defect.

Turn off the machine before maintenance!

Please pay attention to the informations in the instruction manual, you can find manual by reading QR-code.

