


Hako Scrubmaster B45CL

Hako
Clean ahead

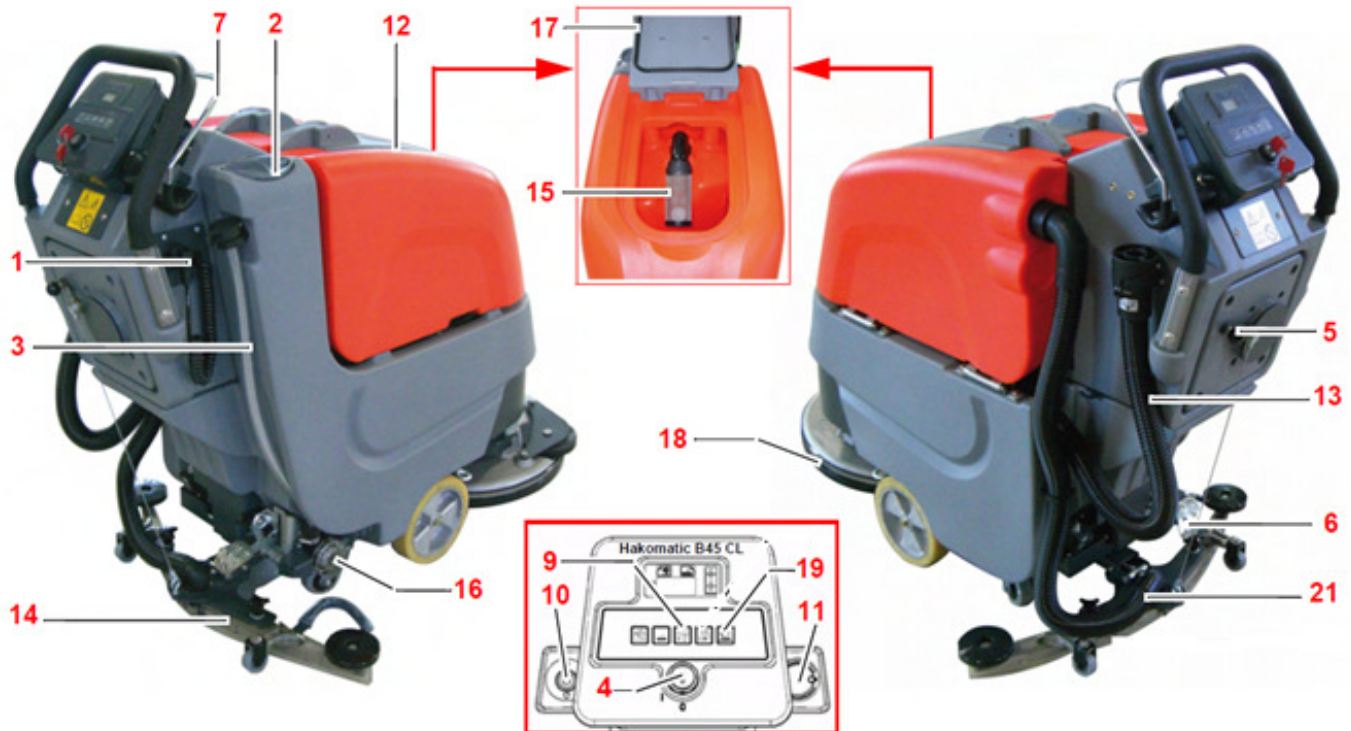

OPERATION:

1. Disconnect mains plug of the charger from outlet and fasten to holder **1**.
2. Fill the clear water tank after folding up the opening **2**. Control the filling level by the filling level indication **3**.
3. Switch the machine on by the key switch **4**. All aggregates are in standby.
4. Use lever **5** to lower squeegee **14**.
5. Use pedal **6** to lower brush head.
6. Adjust driving direction with switch **10** and speed with potentiometer **11**.
7. Pull the bail **7** of the bailsystem. Brush head drive and suction turbine switches on.
8. Use switch **9** to adjust the water (if necessary)


NOTE! Make sure that pad / brush is installed!!!

Qualified persons only are authorised to operate the machine!

The machine is not designed for coarse material! Floor area sweeping before!
Use only cleaning agents suitable for automatic machines (low-foaming)!
Please pay attention to the informations in the instruction manual!

Hako Scrubmaster B45CL

Hako
Clean ahead

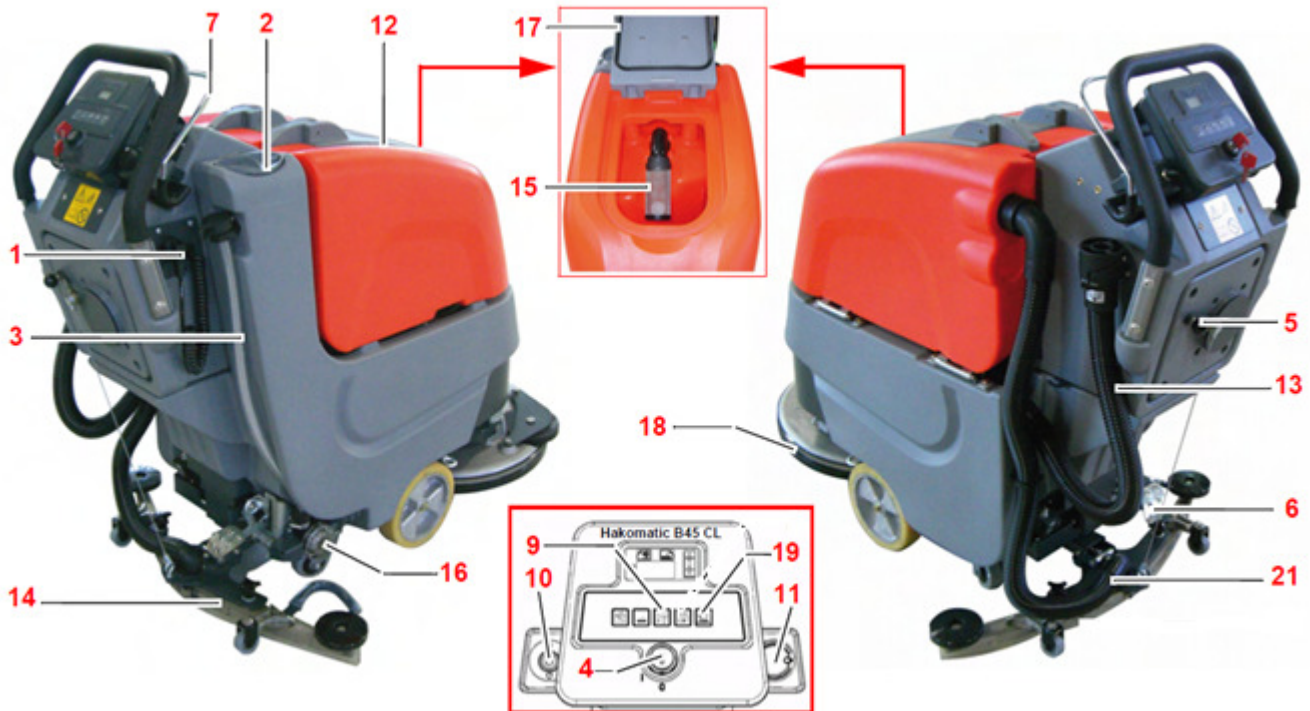

MAINTENANCE AND CARE:

Daily maintenance:

- Empty clear water tank by opening the fresh water filter covering **16**. Check and clean filter if required.
- Empty soiled water tank **12** by the soiled water drain hose **13**. Clean soiled water tank. Check and clean tank lid and lid sealing **17**.
- Check suction filter **15** in the soiled water tank, clean if required.
- Remove suction hose **21** and clean it.
- Remove squeegee **14** and clean it.
- Remove brush / pad holder **18** by keeping button **19** pressed and clean brush / pad. Check brush / pad for wearing.
- Charge battery (take plug from holder **1** and connect with outlet).

Weekly maintenance:

- Check and clean brush head / sealing strip **18**
- Clean the machine from outside
- Grease locking caps o-ring of soiled water drain hose
- Check squeegee sealing strips and turn or replace them.

Cleaning result is bad:

- suction filter **15**, suction hose **21** or squeegee **14** is blocked.
- Locking cap of the soiled water drain hose **13** is open
- Soiled water tank is full
- Tank lid sealing **17** of the soiled water tank is defect.

Turn off the machine before maintenance!
Please pay attention to the informations in the instruction manual, you can find manual by reading QR-code.

