REDUCE SOIL COMPACTION FOR HEALTHIER TURF.

TORO_®

ProCore SR Series deep-tine aerators alleviate subsurface soil compaction, helping to create an environment for turf to thrive. These durable and time-tested products are capable of withstanding the most extreme aeration conditions. From lightweight, precision machines to robust, heavy-duty machines to break up soil on even the most compact surfaces, the ProCore SR Series deep-tine aerators are the ultimate choice for performance and quality.




FEATURES

Deep-tine aerfication relieves soil compaction at lower soil levels than typical aerification. The tines fracture the soil creating channels through the root zone allowing oxygen, water and critical nutrients to penetrate deep into the soil profile.

- Multiple high-performance units for a wide variety of aeration applications.
- Aeration widths of 48"-75" (122-191 cm).
- Aeration depths to 16" (41 cm).
- Hydraulic depth control makes setting aeration depth easy.
- Solid and coring tines available for your specific aeration application.

The Deep-Tine Difference.

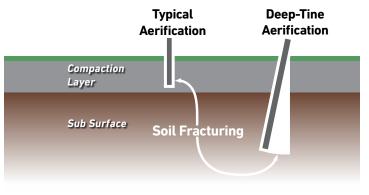

PROCORE® SR SERIES SPECIFICATIONS*

	PROCORE	PROCORE	PROCORE	PROCORE	PROCORE	PROCORE	PROCORE
	SR48	SR54	SR54-S	SR70	SR70-S	SR72	SR75HD
	MODEL 09930	MODEL 09931	MODEL 09932	MODEL 09933	MODEL 09934	MODEL 09935	MODEL 09936
WEIGHT WITH PTO & TOP LINK	1,530 lbs	1,165 lbs	1,250 lbs	1,500 lbs	1,655 lbs	2,091 lbs	3,250 lbs
	(694 kg)	(528 kg)	(567 kg)	(681 kg)	(750 kg)	(945 kg)	(1,475 kg)
WORKING WIDTH	48"	54"	54"	73"	73"	72"	78"
	(1.22 m)	(1.37 m)	(1.37 m)	(1.85 m)	(1.85 m)	(1.83 m)	(1.98 m)
WORKING DEPTH (ADJUSTABLE)	1" - 14"	1" - 10"	1" - 10"	1" - 10"	1" - 10"	1" - 16"	1" - 16"
	(2.5-35.6 cm)	(2.5-25.0 cm)	(2.5-25.0 cm)	(2.5-25.0 cm)	(2.5-25.0 cm)	(2.5-40.6 cm)	(2.5-40.6 cm)
HOLE SPACING	3" - 6"	2.5" - 4"	2.5" - 4"	2.5" - 4"	2.5" - 4"	3" - 6"	3" - 6"
	(75-150 mm)	(64-102 mm)	(64-102 mm)	(64-102 mm)	(64-102 mm)	(75-150 mm)	(75-150 mm)
PRODUCTIVITY	25,000 sq-ft/hr	36,000 sq-ft/hr	36,000 sq-ft/hr	48,000 sq-ft/hr	48,000 sq-ft/hr	38,000 sq-ft/hr	48,000 sq-ft/hı
	(2,325 sq-m/hr)	(3,345 sq-m/hr)	(3,345 sq-m/hr)	(4,460 sq-m/hr)	(4,460 sq-m/hr)	(3,530 sq-m/hr)	(4,460 sq-m/hr)
RECOMMENDED TRACTOR SIZE	25 hp (18.6 kW)	16-18 hp (12-13 kW)	18 hp (13 kW)	25-35 hp (18.6 -26 kW)	25-35 hp (18.6 - 26 kW)	45 hp (34 kW)	55+ hp (41+ kW)
RECOMMENDED LIFT CAPACITY	1,800 lbs	1,200 lbs	1,500 lbs	1,700 lbs	1,800 lbs	2,800 lbs	4,000 lbs
	(817 kg)	(682 kg)	(682 kg)	(773 kg)	(817 kg)	(1,270 kg)	(1,815 kg)
RECOMMENDED COUNTER	300 lbs	150 lbs	150 lbs	250 lbs	250 lbs	300-500 lbs	700-900 lbs
WEIGHT	(135 kg)	(70 kg)	(70 kg)	(115 kg)	(115 kg)	(135-225 kg)	(315-410 kg)
RECOMMENDED PTO SPEED	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm
ACTUAL WORKING SPEED @ 400 PTO RPM (VARIES WITH HOLE SPACING)	. 8 -1.3 mph (1.29 - 2.09 kph)	1.5 -2.5 mph (2.41 - 4.02 kph)	1.5 -2.5 mph (2.41 - 4.02 kph)	1.5 -2.5 mph (2.41 - 4.02 kph)	1.5 -2.5 mph (2.41 - 4.02 kph)	0.8 -1.5 mph (1.29 - 2.41 kph)	0.8 -1.5 mph (1.29 - 2.41 kph)
LIFT SYSTEM	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point
CERTIFICATION	ANSI B71.4-1999, CE and EU machinery directives.						
WARRANTY	Two-year or 500-hour limited warranty. Refer to Operator's Manual for further details.						

PROCORE SR SERIES ACCESSORIES

Model	Rear Roller Options		
09952	Rear Roller Kit for ProCore SR54/SR54S		
09953	Rear Roller Kit for ProCore SR70/SR70S		
09954	Rear Roller Kit for ProCore SR72		
09956	Rear Roller Kit for ProCore SR75		

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. Consult your local Toro Distributor.

Rev. 2/15

toro.com

Worldwide Headquarters The Toro Company 8111 Lyndale Ave. So. Bloomington, MN 55420 U.S.A. Phone: (1) 952 888 8801 Fax: (1) 952 887 8258

Printed in U.S.A. ©2016 The Toro Company. All Rights Reserved. 200-7308 GB





You Tube

facebook.com/ToroCompany twitter.com/TheToroCompany youtube.com/ToroCompanyEurope

f

