

Hako Scrubmaster B75 R

Hako
Clean ahead



OPERATION


1. Disconnect mains plug of the charger and put it in front of the seat **1**.
2. Fill the clear water tank from opening **2**. Control the filling level by the filling level indication **3**.
3. Switch the machine on by the key switch **4**. Actuate drive direction from switch **5**.
4. Press green button **6** to lower brush head **7** and squeegee **8**, suction turbine switches on.
5. Press pedal **9** machine moves and brush head drive switches on. Use lever **10** to adjust the water (if necessary)

NOTE! Make sure that pads / brushes are installed!!!

Qualified persons only are authorised to operate the machine!
The machine is not designed for coarse material! Floor area sweeping before!
Use only cleaning agents suitable for automatic machines (low-foaming)!
Please pay attention to the informations in the instruction manual!

Hako Scrubmaster B75R

Hako
Clean ahead

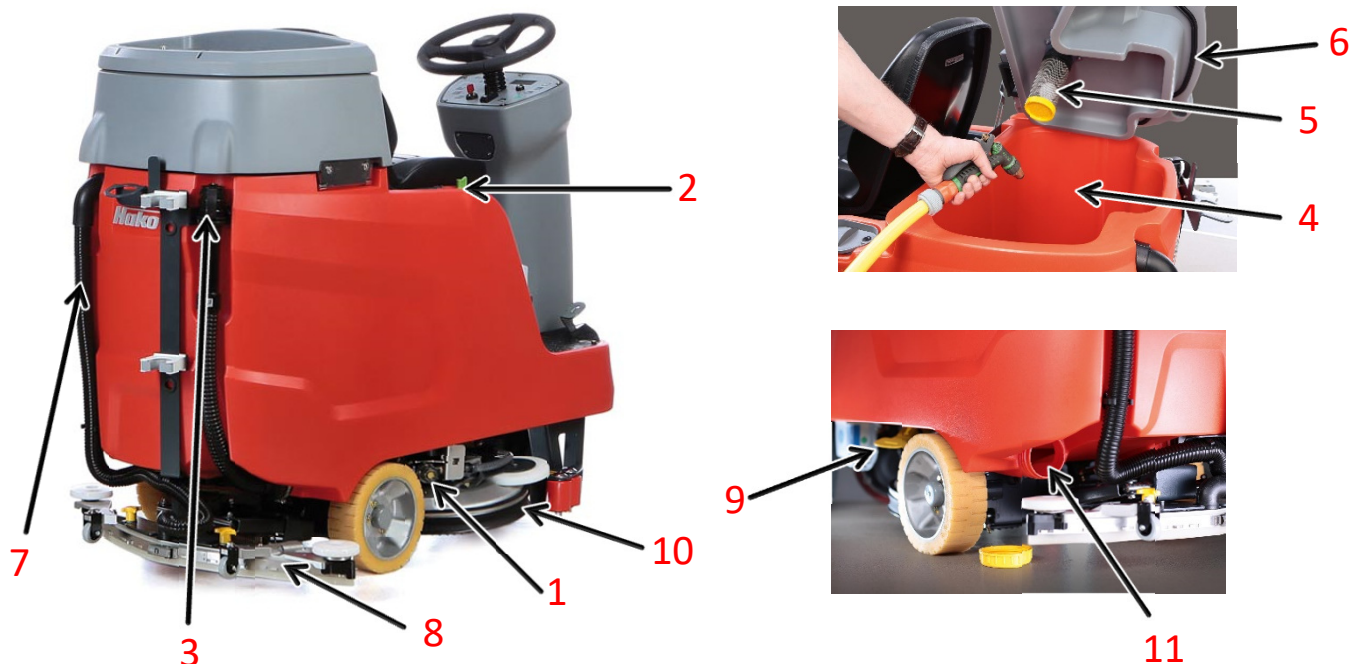

MAINTENANCE AND CARE:

Daily maintenance:

- Empty clear water tank by opening the fresh water filter covering **1**. (lever which adjusts the water **2** must be open)
- Empty soiled water tank from hose **3** and clean soiled water tank **4**.
- Check suction filter **5** in soiled water tank lid and lid sealing **6**, clean if required.
- Remove suction hose **7** and clean it.
- Remove squeegee **8** and clean it, check sealing strips
- Remove brushes / pad holders pressing yellow pedal **9** and clean them. Check brushes / pads for wearing.
- Charge battery

Weekly maintenance:

- Check and clean brush head / brush head sealing strip **10**.
- Clean the machine from outside.
- Open and clean clear water filter **1**
- Clear water tank thorough emptying / maintenance from opening **11**
- Check squeegees sealing strips **8** and turn or replace them if necessary.

Clean result is bad:

- suction filter **5**, suction hose **7** or squeegee **8** is blocked.
- Locking cap of the soiled water drain hose **3** is open.
- Tank lid sealing **6** of the soiled water tank is defect.

Turn off the machine before maintenance!
Please pay attention to the informations in the instruction manual, you can find manual by reading QR-code.

